



# Access Point 1167Mbps AC Wis WCAP-AC-5 Cloud 5pcs



## Product Overview

The WisCloud Indoor Access Point is the innovative series of products with remarkable performance in their features. All configuration and management is centrally and effectively operated by the WisCloud Controller.

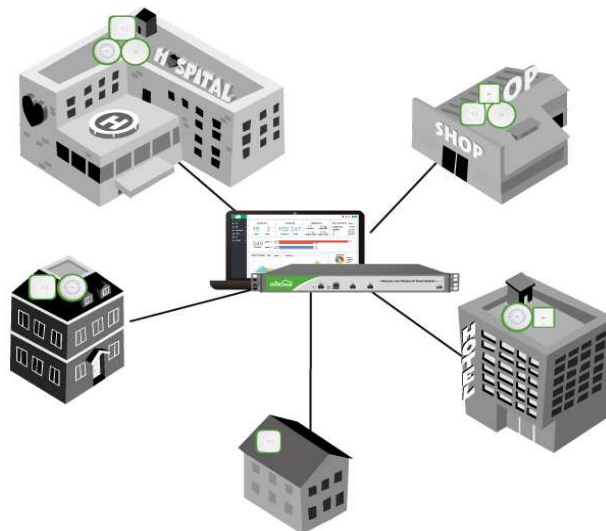

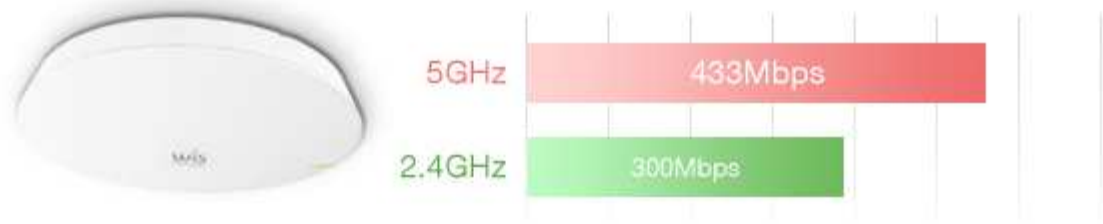

## Enterprise Level Radio Chip-set

The high speed 720MHz Atheros CPU and 128MB DDR makes WisCloud access points much powerful to provide a stable connectivity and multifunctional wireless networks.



## Various APs Optional

To meet different requirements from customers, we provide corresponding AP with different feature parameters including frequency, speed, tx power and installation method etc.




## Easy Installation

With our mounting kits, customers can easily mount it in different indoor conditions. While the AP is mounted on the ceiling or on the wall, you can avoid most interference and extend your Wi-Fi coverage.



## Support for Standard PoE

WisCloud Access Point is able to be supplied power by a power injector using 802.3af(48 VDC) PoE technology and make it more flexible to deploy the device in indoor ceiling environment.

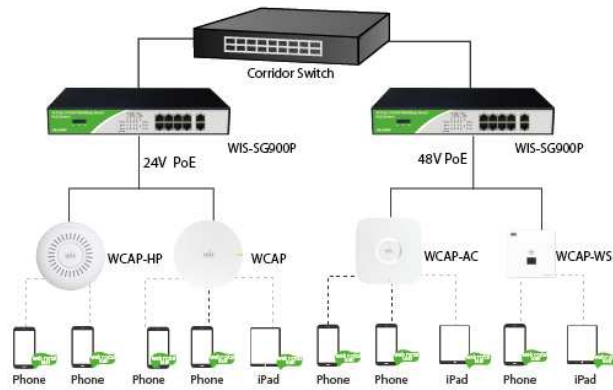

# Cloud-Managed Wireless Networks

Deploy WisCloud AP and scale up easily without any on-site controllers, truly cloud architecture.



## Wireless Characteristics

Wi-Fi Standard	802.11ac/n/a/g/b
Frequency	2.4GHz&5GHz
Speed	733Mbps
Max Tx Power	23dBm
Antenna	3dBi Dual-Pola Omni
Multi-SSID	up to 8 SSID Per Radio
Wireless Security	WEP, WPA-PSK, WPA-Enterprise (WPA/WPA2, TKIP/AES)
Concurrent Clients	150+
Coverage Range	150m

## Physical Characteristics

Processor	Atheros SoC 600MHz
Flash / Memory	128MB DDR, 16MB Flash
LAN Port	1*10/100M Gigabit
Button	Reset
Power	48VDC/0.32A 802.3af
Dimension	φ160*30mm
Mounting	Ceiling Mount/Wall Mount
Certification	CE/RoHS
Max Power Consumption	8W
Working Temperature	-10°C~60°C
Working Humidity	0%~95% non-condensing

## Advanced Characteristics

Mode	Fat AP/Fit AP
VLAN	802.1q
Guest Policy	Web Portal/Password
MAC Filter	Blacklist
User QoS	Speed Limit by User Group
Traffic History	Duration/Download/Upload
Load Balance	Online User / Bandwidth
Roaming	Supported

More information:

[www.wisnetworks.com](http://www.wisnetworks.com)



## DECLARATION OF CONFORMITY

We, Importer/Distributor DOTMEDIA LTD

*KATEVASIAS & NTALIAS 18 AXARNAI, GREECE*

In accordance with the following Directives:

**EMC Directive 2004/108/EC, Low Voltage Directive 2006 /95/EC,  
R&TTE Directive 1999/5/EC**

The product is compatible with the following norms/standards

<u>Applied Standards</u>	<u>Report No.</u>
Article 3.2 : Effective Use OF the Radio Spectrum ETSI EN 300 328 V1.7.1 (2006-10)	TEK-2013NT1213776R1 (07/01/2015)
Article 3.1b : Electromagnetic Compatibility ETSI EN 301 489-17 V2.2.1 (2012-09) ETSI EN301 489-1 V1.9.2 (2011-09)	NTEK-2013NT1213774E1 (07/01/2015)
Article 3.1a : Health and Safety ETSI EN 62311:2008 EN 60950-1:2006+A11:2009+A1:2010+A12:2011	NTEK-2013NT1213774H (07/01/2015) NTEK-2013NT1213776S (23/01/2015)

### Hereby we declare that:

Equipment                      ACCESS POINTS  
Model number  
D5230/G5250/D523AC/WCAP/WCAP-AC-OS/WCAP-AC-OL  
/WCAP-AC/WCAP-AC-L/WCAP-AC/WCAP-AC-PROM/WCAP/WCAP-  
WS/WCAP-AC-W/WCAP-HP/WCAP V2-5pcs/WCAP-AC-L-  
5pcs/WCAP-AC-5pcs/ WIS-S800AC/WIS-S806AC/  
Brand name                      WISnetworks

*Is in conformity with the applicable requirements of the following documents*  
I hereby declare that the equipment named above has been designed to comply with the  
Relevant sections of the above referenced specifications. The unit complies with all  
Applicable Essential Requirements of the Directives

Place and date of issue

AXARNAI, 09/03/2018

Signature

DOTMEDIA ΕΜΠΟΡΙΑ ΑΝΑΛΩΣΙΜΩΝ ΕΙΔΩΝ  
& ΕΦΑΡΜΟΓΩΝ ΠΛΗΡΟΦΟΡΙΚΗΣ ΕΠΕ  
ΧΩΝΔΡΙΚΟ ΕΜΠΟΡΙΟ ΚΑΙ ΠΑΡΑΓΩΓΗ ΕΞΑΡΤΗΜΑΤΩΝ  
ΚΑΤΕΒΑΣΙΑΣ & ΝΤΑΛΙΑΣ, ΑΧΑΡΝΕΣ Τ.Κ. 17671  
Α.Φ.Μ.: 999075747 Δ.Ο.Υ.: ΑΧΑΡΝΩΝ  
ΤΗΛ.: 210 2849836, 210 2840486, 210 2849419  
FAX: 210 2446835

(Theodoros Mavroeidis)