


USB3.0 M(A)
(BLACK COLOR)

MIRCO USB BM 10PIN
(BLACK COLOR)


| Item No. | Color | Length | EAN Code |
|----------|-------|-----------|---------------|
| CU0026 | Black | 1000±30mm | 4052792004564 |
| CU0027 | Black | 2000±30mm | 4052792004571 |
| CU0028 | Black | 3000±30mm | 4052792004588 |
| CU0037 | Black | 600±15mm | 4052792001006 |




PACKING:1PCS/PE BAG+LABEL

NOTE:

- CABLE: UL2725,AL+B-FOIL,(30AWG*1P)+[AL+MY-FOIL,(30AWG*1P+D)]*2+24AWG*2C+AB.
BLACK COLOR,OD=5.5±0.2m,PVC JACKET.
- LENGHT: L.
- CONNECTORS: USB3.0 M(A)*1PCS(BLUE INSULATOR) MIRCO USBBM 10PIN*1PCS(BLACK INSULATION)(SHELL NICKEL)(PIN GOLD 15U”).
- MOLD: MOLDING TYPE.
- CONTACTS:

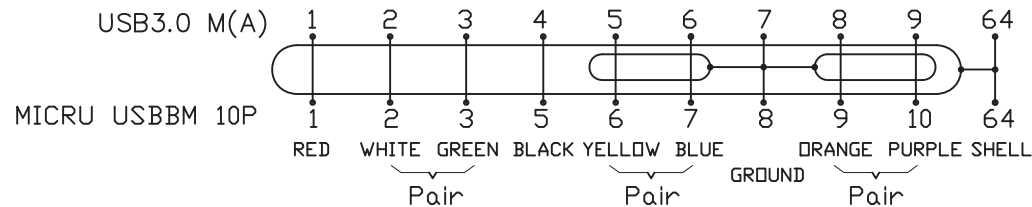

Sticker ex:

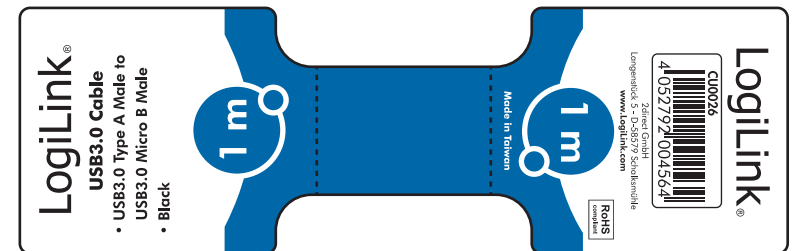

Pantone 2945C, Black
Size: 48x150 mm R= 2mm
材質: 80P銅版紙,上亮PP(光膠)

- Test machine test condition.
A.100% OPEN,SHORT&INTERMITANCE TEST.
B.CONDUCTOR RESISTANCE: 3ohms MAX:
C.INSULATION RESISTANCE: 5M Min/,10ms:
7. ALL MUST BE MEET ON ROHS COMPLIANT.

| COMPANY | ITEM NO. | | CU0026 to CU0028, CU0037 | NO | B6131 | Part Name | USB3.0AM-MICRO10P BM-28/24 | SCALE | |
|----------|------------|-------------|--------------------------|------|-------|--------------|----------------------------|----------|-----|
| REVISION | DATE | DISCRIPTION | DRAWN BY | SPEC | | 2direct GmbH | | UNIT(mm) | |
| REV.A/0 | 2011.12.25 | T10-1112009 | DESIGNED BY | | | | | PAGE | 1/1 |
| | | | APPROVAL BY | | | | | | |